



FOOD WARMERS {HOT TOPPING} TWIN PUMP/LADLE

Models Twin FS/FSP
Twin FSP
Twin FS

Date:

Project:

Quantity:

Item Number:



Twin FS/FSP 81290



Twin FS 81220



ALSO AVAILABLE
FOR EXPORT



Warranty

Server Products equipment is backed by a two-year limited warranty against defects in materials and workmanship. For our complete warranty statement, please refer to server-products.com.

Bid Description

All stainless steel construction with a brushed (#4) finish. Each dispenses directly from (2) stainless steel jars or #10 cans (not included).

(2) adjustable precalibrated thermostats control individual 500 watt heating elements. Temperature settings—marked on thermostat knobs—range from 100° F (38° C) to 200° F (93° C). Power is controlled with (2) ON/OFF rocker switches.

The Twin FS/FSP is designed to pump and ladle hot toppings. Comes complete with a lift-off lid and 1 ounce (30 mL) 10" (25.4 cm) Ladle (82561). The pump features a rugged cast valve body and welded construction. Maximum stroke yields 1 ounce (30 mL). Gauging collars are supplied to reduce yield in 1/8 ounce (3.7 mL) increments.

The Twin FSP is designed to pump (2) hot toppings.

The Twin FS is designed to ladle (2) hot toppings.

Standard Features

All stainless steel construction for durability

Pump design prevents loss of valve balls

Water fill line eliminates overflow accidents

(2) 500 watt heating elements for reliable heating and holding

Adjustable precalibrated thermostats for accurate heat control

Temperature marks on knobs with protective knob guard

Dispense directly from stainless steel jars or #10 cans

Pump stroke yields 1 ounce (30 mL), now adjustable in 1/8 ounce (3.7 mL) increments — allows for Portion Optimization™

(2) cleaning brushes included with pumps for maintenance

Topping Equipment Accessories

☐ 1 oz (30 mL) 10" (25.4 cm) Ladle 82561

☐ 3 qt (2.8 L) Stainless Steel Jar 94009



Specifications on reverse side



FOOD WARMERS {HOT TOPPING} TWIN PUMP/LADLE

Models Twin FS/FSP
Twin FSP
Twin FS

Twin Fudge Server with Pump and Ladle

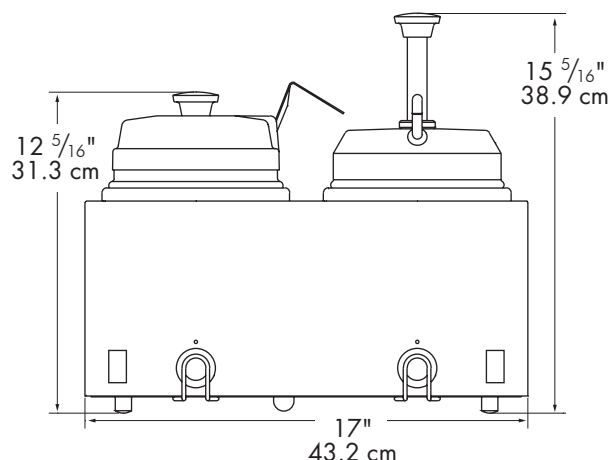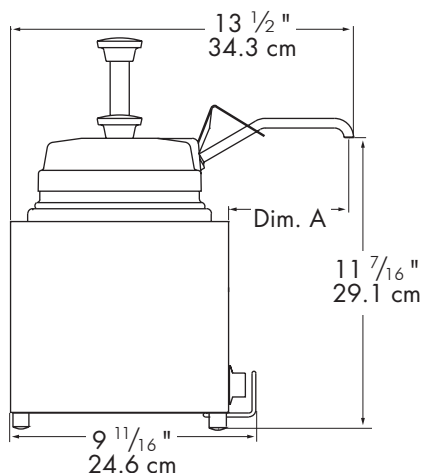

Specifications

Construction	Brushed (#4) stainless steel units. Pumps feature a rugged cast valve body and welded construction.
Capacity	(2) stainless steel jars or #10 cans hold 3 quarts (2.8 L) each; 6 quart (5.7 L) total.

Models	Twin FS/FSP 81290	Twin FSP 81230	Twin FS 81220 ^{1R}
Height	15 ⁵ / ₁₆ in 38.9 cm	15 ⁵ / ₁₆ in 38.9 cm	12 ⁵ / ₁₆ in 31.3 cm
Width	17 in 43.2 cm	17 in 43.2 cm	17 in 43.2 cm
Depth	13 ¹ / ₂ in 34.3 cm	13 ¹ / ₂ in 34.3 cm	9 ¹¹ / ₁₆ in 24.6 cm
Dim. A	4 ³ / ₄ in 12.1 cm	4 ³ / ₄ in 12.1 cm	N/A
Weight	18 lb 8.2 kg	19 lb 8.6 kg	17 lb 7.8 kg
Electrical	120V, 60Hz, 1000W, 8.3A 72 in (183 cm) cord set NEMA 5-15P, 15A, 120V PLUG		

FOB Richfield, Wisconsin 53076

NSF Listed as a rethermalization unit to ensure food is quickly heated to a safe temperature before bacteria has an opportunity to grow. ^{1R}

CAD Library

Individual CAD images can be downloaded from product pages on our web site. We are also a member of The KCL CADalog with more than 100 other manufacturers. Our complete collection of CAD files can be purchased through Kochman Consultants, Ltd. at kclcad.com.



Server Products, Inc. • P.O. Box 98 • Richfield, WI 53076 • Toll Free: 800-558-8722
P: 262-628-5600 • F: 262-628-5110 • spsales@server-products.com • server-products.com
Server Products, Inc. reserves the right to modify specifications without obligation. Printed in USA

9.2009/1M Stock 02051