

BUNN®

3 Gallon Iced Tea Brewer with Portable Server

ITEM#

PROJECT

DATE



Model TB3Q with TDO-4 Dispenser

(TDO-4 sold separately)

Dimensions (29" trunk): 34" H x 11.6" W x 22" D
(86.4cm H x 29.5cm W x 58.4cm D)

Dimensions (25.75" trunk): 31" H x 11.6" W x 22" D
(78.7cm H x 29.5cm W x 58.4cm D)

Features

Iced Tea Brewer

- Brews 16.3 to 26.7 gallons (61.7 to 101.1 litres) per hour from real tea leaves.
- Brews directly into any style portable server.
- Meet your volume needs; brew 3 gallons (11.36 litres) of iced tea at a time.
- Quickbrew (Q) models available for shorter brewing cycles.
- SplashGard® funnel deflects hot liquids away from the hand.
- TB3 has adjustable steep time for more control over flavor extraction.
- International electrical configurations available.

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQHP-Tea
Product No. : 39000.0007



Easy Clear® EQHP-TEACRTG
Replacement Cartridge
Product No. : 39000.1007

Single/Dual Filter Pack
Product No. : 20100.0000
Packed per case: 500
Dimensions: 5 1/4" Base x 3 3/4" Sidewall
13.34 cm Base x 9.52 cm Sidewall



TDO-4 – Tea Dispenser
Product No. : 34100.0002
Capacity: 4 gallons
Weight: 13 lbs.
Dimensions:
19" H x 10.7" W x 13.7" D
48.26 cm H x 27.18 cm W x 34.8 cm D



TD4T – Tea Dispenser
Product No. : 03250.0004
Capacity: 4 gallons
Weight: 14 lbs.
Dimensions:
21.9" H x 9" W x 13" D
55.63 cm H x 22.86 cm W x 33.02 cm D



TDS-3.0 – Tea Dispenser
Product No. : 33000.0000
Capacity: 3.0 gallons
Weight: 9.4 lbs.
Dimensions:
19"H x 9.8"W x 12.8"D
48.3cm H x 24.9cm W x 32.5cm D



Translucent Pouchpack Tea Funnel
Quick dispense, TU-3Q
Product No. : 35282.0001
Standard dispense, TU-3
Product No. : 35282.0002



Model

Agency Listing

TB3Q



TB3



Dimensions & Specifications


Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cubic Measure	Shipping Weight	Cord Attached
TB3 [†]	36700.0009	120	14.4	1680	1730	16.3 gal./hr.	8.8 ft ³	43 lbs.	Yes [†]
TB3Q [†]	36700.0013	120	14.4	1680	1730	26.7 gal./hr.	8.8 ft ³	42 lbs.	Yes [†]
TB3	36700.0030	120	14.4	1680	1730	16.3 gal./hr.	7.9 ft ³	42 lbs.	Yes [†]
TB3Q [†] w/TD4T	36700.0041	120	14.4	1680	1730	26.7 gal./hr.	10 ft ³	55 lbs.	Yes [†]
TB3 [†] Sweetner	36700.0043	120	14.4	1680	1730	16.3 gal./hr.	8.8 ft ³	44 lbs.	Yes [†]
TB3 [†] ^μ	36700.0055	120	14.4	1680	1730	16.3 gal./hr.	8.8 ft ³	42 lbs.	Yes [†]
TB3Q	36700.0059	120	14.4	1680	1730	26.7 gal./hr.	8.8 ft ³	41 lbs.	Yes [†]
TB3Q [†] [†]	36700.0076	120	14.4	1680	1730	26.7 gal./hr.	8.8 ft ³	42 lbs.	Yes [†]
TB3Q [†] w/TD4T	36700.0080	120	14.4	1680	1730	26.7 gal./hr.	10 ft ³	55 lbs.	Yes [†]

w/6 foot cord

[†]Quick disconnect. [†]29" trunk height ^μHas ready light [†]Power cord (NEMA 5-15P) 15 Amp-120V machine only.

Electrical: Models require 2-wires plus ground service rated at 120V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" OD male flare fitting.

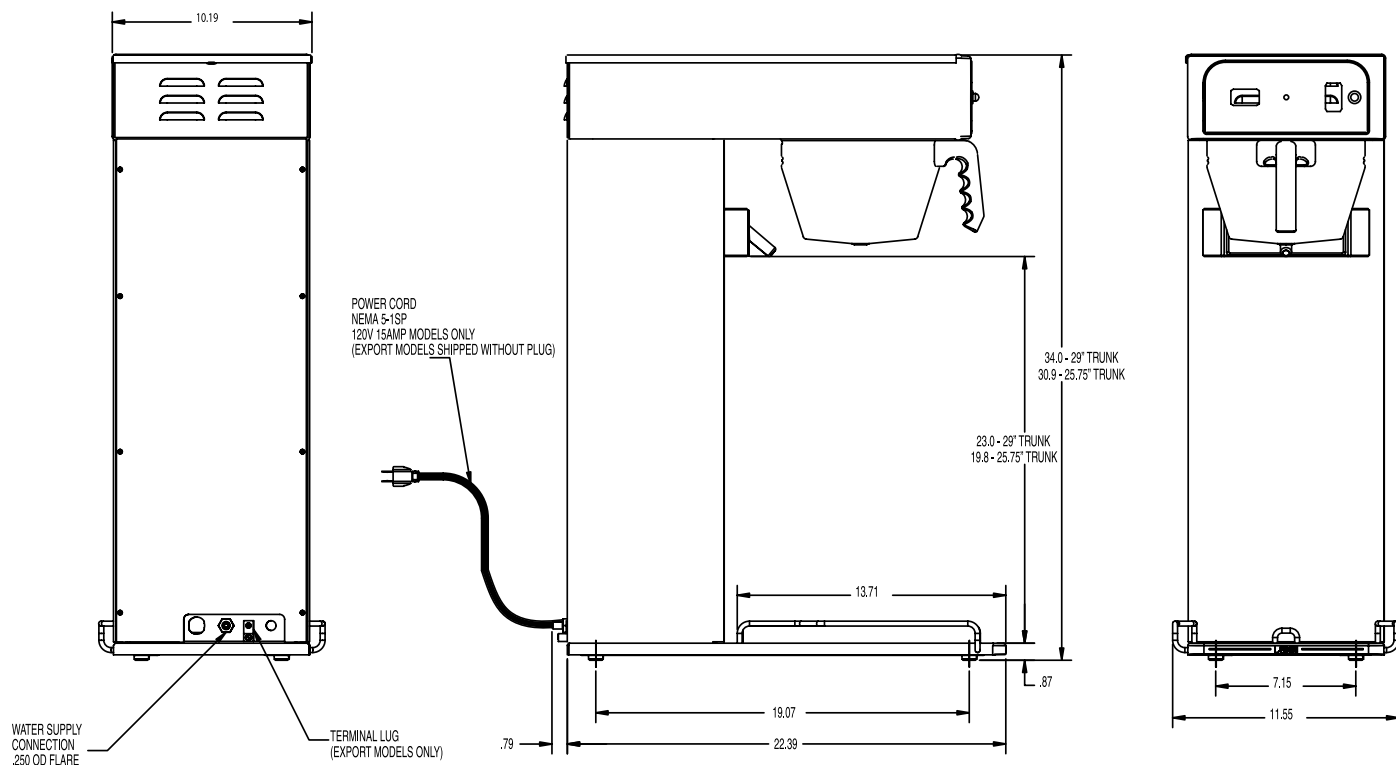

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn-O-Matic Corporation owns all copyrights relating to materials in this publication. Please contact BUNN to request permission to reproduce any portion of this publication.