

DishStar® HT-E-SEER

Project _____
Item _____
Quantity _____
CSI Section 11400 _____
Approval _____
Date _____

DishStar® HT-E-SEER

Models

DishStar HT-E-SEER



Standard Features

- Steam Elimination
- Energy Recovery System collects the hot water vapor inside the machine and uses it to preheat the incoming rinse water
- Operates on a single cold water connection
- Automatic fill
- Push button start
- Built-in booster heater with Sani-Sure™ final rinse system
- Door interlock
- Pressure regulator
- Water hammer arrestor
- Labyrinth type door design
- Automatic pumped drain for floor and wall drain installations
- Stainless steel wash pump
- Universal timer
- Digital LED control panel
- Delime cycle
- Simplified controls allow easy access for operation and service
- Door switch
- One (1) each peg and combination rack included
- Built-in chemical pumps and priming switches

Mandatory Specs

Specify voltage _____

Options

- ☐ Back Panel
- ☐ Drain Water Tempering Kit
- ☐ Scale Prevention System (SPS)
- ☐ Replacement Cartridge for SPS
- ☐ Casters (adds 3/4" to height)
- ☐ Tie Down

Accessories

- ☐ 36-Compartment Rack
 - ☐ 4-1/8" tall (105 mm)
 - ☐ 5-5/8" tall (143 mm)
 - ☐ 7" tall (178 mm)
- ☐ Combination Rack
- ☐ Peg Rack
- ☐ Machine Stand
 - ☐ 6" (152 mm) high
 - ☐ 18" (457 mm) high

Specifications

High temperature undercounter dishwasher with steam elimination and energy recovery

Operates on a single cold water connection

Uses 0.65 gallons (2.47 liters) of water per rack

Uses 13.0 gallons (49.21 liters) of water per hour

Cleans 20 racks per hour

Three selectable cycles:

- Normal - 145 seconds
- Heavy - 213 seconds
- Extra-Heavy - 313 seconds

Powerful 1 hp wash pump motor

Air insulated between body and stainless steel housing

Durable stainless steel construction

NOTE: A vent hood is not recommended above the Jackson DishStar HT-E-SEER as it does not produce excessive vapors. Always check with the local building code to know what type of ventilation is required for commercial dishmachine installations in your area.




Intertek



Intertek



DishStar® HT-E-SEER

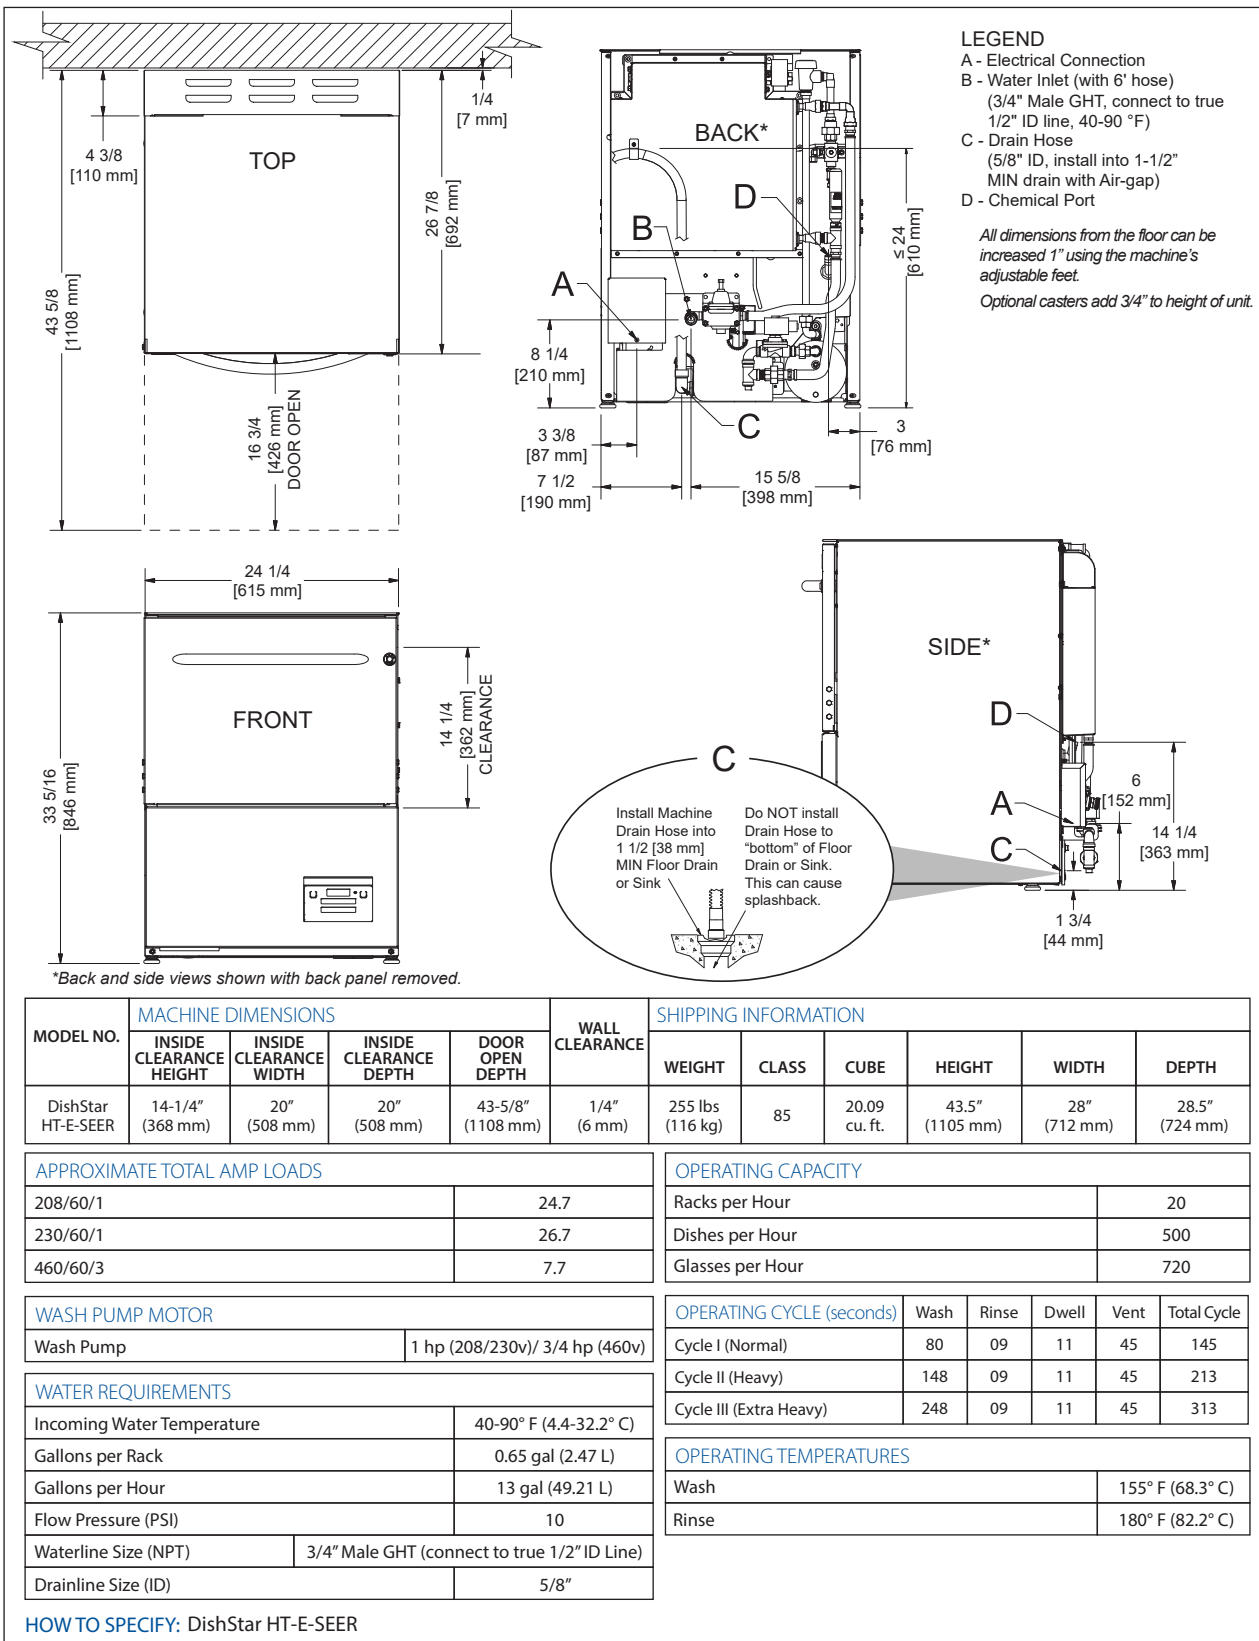

Jackson WWS, Inc.

Shipping Address: 6209 North U.S. Highway 25E, Gray, KY 40734

Mailing Address: P.O. Box 1060, Barbourville, KY 40906

Telephone: 888-800-5672 • Fax: 606-523-1799

Email: info@jacksonwws.com

07610-004-54-39 [11/16/2020B]

www.jacksonwws.com

We reserve the right to change specifications in this bulletin without incurring any obligation for equipment previously or subsequently sold.