

# manual convection oven

model: **GS1115**



## **CAPACITY**

3- 18" x 13" / 46cm x 33cm half size pans

## **FUNCTIONAL FEATURES**

- Set temperature from 200°F to 500°F
- Cooking time adjustable up to 2 hours or "infinite" time to adjust cooking duration
- Convection cooking
- Broil feature
- 8 cooking configurable options:
  - Top and bottom heating elements in static mode
  - Bottom heating element in static mode
  - Top heating elements in static mode
  - Grill heating elements in static mode
  - Grill heating elements in convection mode
  - Top and bottom heating elements in convection mode
  - Fan heating elements in convection mode
  - Only fan (indicated to defrosting frozen products)



## **CONSTRUCTION FEATURES**

- Cooking chamber entirely made with stainless steel
- Oven shell entirely made with stainless steel
- Inspection door to facilitate cleaning operations
- Reversing motor to guarantee cooking uniformity
- Recessed gasket to guarantee chamber cooking seal

Great for any size kitchen that needs to bake in small batches. This half size convection oven is the perfect space-saving solution for a tight kitchen. The broil function allows you to put the finishing touch on your food creations.

# manual convection oven

model: **GS1115**

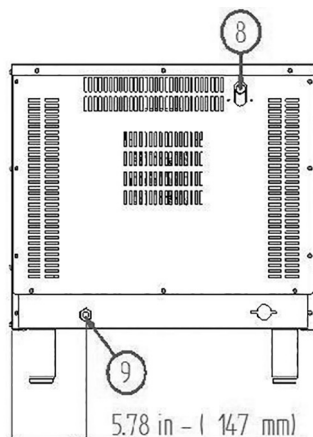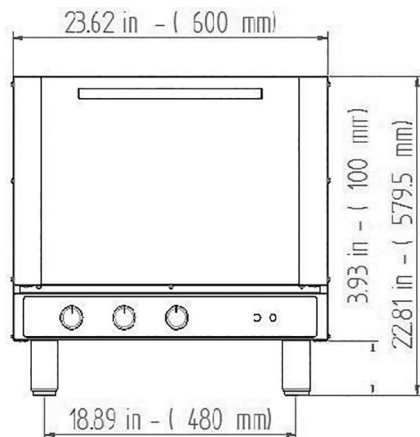

- 8. Steam Exhaust
- 9. Cable Gland for Power Supply

## INSTALLATION REQUIREMENTS:

- The oven must be positioned on a leveled surface
- Hot surfaces must comply with the minimum distances from the oven:

LEFT SIDE: 19.7" (50cm)  
RIGHT SIDE: 19.7" (50cm)  
REAR PANEL: 19.7" (50cm)

- Other surfaces must comply with the minimum distances from the oven:

LEFT SIDE: 3.94" (10cm)  
RIGHT SIDE: 3.94" (10cm)  
REAR PANEL: 3.94" (10cm)

## SPECIFICATIONS:

Width ..... 23.62" (60cm)  
Depth..... 27.91" (70.9cm)  
Height..... 22.81" (57.95cm)  
Unit Weight ..... 94 lbs (42.6kg)  
Shipping Weight ..... 105 lbs (47.6kg)  
**Voltage.....208-240**  
**Rated Wattage.....2750-2900**  
**Nominal Amps ..... 11.5-13**  
**Plug Configuration ..... NEMA 6-20**