



## Glo-Ray® Slant Merchandising Display Warmers

Models: GRSDS-24, -30, -36, -41, -52, -60  
GRSDS-24D, -30D, -36D, -41D, -52D, -60D

Hatco's Glo-Ray® Slant Merchandising Display Warmers are designed specifically to hold hot wrapped or boxed product safely, and at proper serving temperatures. With pre-focused infrared top heat and a thermostatically-controlled hardcoated heated base, providing optimal holding times. They offer the convenience of self-serve and the efficiency of kitchen-to-server holding.

### Standard features

- Shelves are slanted for the convenience of self-service
- Models have pre-focused infrared top heat directing heat to the outer edges of the holding surface where heat loss is the greatest
- Thermostatically-controlled, hardcoated heated base has a temperature range of 185°- 200°F (85°- 93°C)
- Coated shatter-resistant incandescent lights enhance product display while safeguarding food products from bulb breakage
- NSF require units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included
- Standard units shipped with: tempered glass side panels, hardcoated shelves, coated shatter-resistant incandescent lights, adjustable dividers, 4" (102 mm) legs, and a 6' (1829 mm) cord with plug

Project \_\_\_\_\_  
Item # \_\_\_\_\_  
Quantity \_\_\_\_\_



GRSDS-30  
Slant single shelf in  
optional Designer Black



GRSDS-24D  
Slant dual shelf

### Options (available at time of purchase only)

#### Designer Colors

Non-standard colors are non-returnable – Glossy Gray standard  
☐ Warm Red ☐ Black ☐ Gray Granite ☐ White Granite  
☐ Navy Blue ☐ Hunter Green ☐ Antique Copper

☐ LED Indicating Temperature Control

☐ Stainless Steel End Panels in lieu of Glass End Panels

5" (127 mm) Sneeze Guard (customer side only)

☐ 24" ( 609 mm) model ☐ 30" ( 762 mm) model

☐ 36" ( 914 mm) model ☐ 41" (1041 mm) model

☐ 52" (1321 mm) model ☐ 60" (1524 mm) model

☐ 60 Watt Halogen Bulb in lieu of Standard Display Light  
(not available for export voltages)

☐ Flip-up Door Locking Plate

Display Sign Holder (signs not included) Color Matches Unit Color  
- Top or Intermediate Shelf

☐ 24" ( 609 mm) model ☐ 30" ( 762 mm) model

☐ 36" ( 914 mm) model ☐ 41" (1041 mm) model

☐ 52" (1321 mm) model ☐ 60" (1524 mm) model

### Accessories

☐ 4" (102 mm) Adjustable Legs

(Standard on models GRSDS-36 and larger, and all dual models)

Plexi-Glass Flip-Up doors on one side - Not compatible with optional sneeze guards in same opening (one side only)

☐ 24" ( 609 mm) model ☐ 30" ( 762 mm) model

☐ 36" ( 914 mm) model ☐ 41" (1041 mm) model

☐ 52" (1321 mm) model, split doors ☐ 60" (1524 mm) model, split door

☐ Additional Stainless Steel Divider Rods

For operation, location and safety information,  
please refer to the Installation & Operating Manual.




HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com




# Glo-Ray® Slant Merchandising Display Warmers

Models: GRSDS-24, -30, -36, -41, -52, -60 GRSDS-24D, -30D, -36D, -41D, -52D, -60D

## SLANT SINGLE SHELF




FRONT VIEW

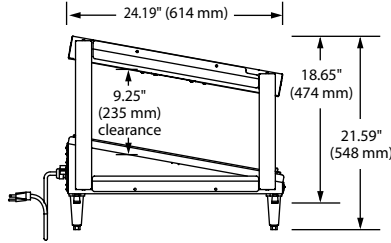


SIDE VIEW

## SLANT DUAL SHELF



FRONT VIEW

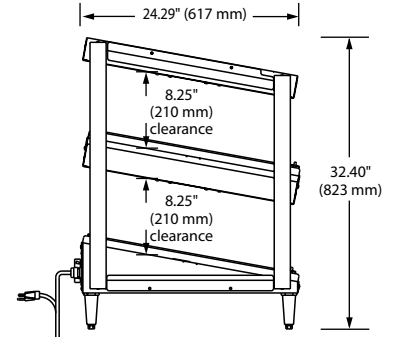

SIDE VIEW

## SPECIFICATIONS

### Single Shelf — Slant Merchandising Display Warmers

The shaded areas contain electrical information for International models

| Model    | No. of Bulbs, Divider Rods | Dimensions (W x D x H)                                                | Usable Heated Shelf Space (W x D) | Average Chute Width | Volts        | Watts     | Amps    | Plug                    | Ship Weight*     |
|----------|----------------------------|-----------------------------------------------------------------------|-----------------------------------|---------------------|--------------|-----------|---------|-------------------------|------------------|
| GRSDS-24 | 2, 5                       | 24" x 24.19" x 18.65"<br>(610 x 614 x 474 mm)<br>on 1" (25 mm) legs   | 22.5" x 21"<br>(571 x 533 mm)     | 3.75"<br>(95 mm)    | 120          | 695       | 5.8     | NEMA 5-15P              | 80 lbs. (36 kg)  |
|          |                            |                                                                       |                                   |                     | 220          | 629       | 2.9     | CEE 7/7 Schuko, BS-1363 | 80 lbs. (36 kg)  |
|          |                            |                                                                       |                                   |                     | 240          | 749       | 3.1     | BS-1363, AS 3112        |                  |
|          |                            |                                                                       |                                   |                     | 220-230 (CE) | 629-688   | 2.9-3.0 | CEE 7/7 Schuko, BS-1363 |                  |
|          |                            |                                                                       |                                   |                     | 230-240 (CE) | 688-749   | 3.0-3.1 | BS-1363                 |                  |
| GRSDS-30 | 2, 6                       | 30" x 24.19" x 18.65"<br>(762 x 614 x 474 mm)<br>on 1" (25 mm) legs   | 28.5" x 21"<br>(723 x 533 mm)     | 4.25"<br>(108 mm)   | 120          | 790       | 6.6     | NEMA 5-15P              | 80 lbs. (36 kg)  |
|          |                            |                                                                       |                                   |                     | 220          | 730       | 3.3     | CEE 7/7 Schuko, BS-1363 | 80 lbs. (36 kg)  |
|          |                            |                                                                       |                                   |                     | 240          | 870       | 3.6     | BS-1363, AS 3112        |                  |
|          |                            |                                                                       |                                   |                     | 220-230 (CE) | 730-799   | 3.3-3.5 | CEE 7/7 Schuko, BS-1363 |                  |
|          |                            |                                                                       |                                   |                     | 230-240 (CE) | 799-870   | 3.5-3.6 | BS-1363                 |                  |
| GRSDS-36 | 2, 7                       | 36" x 24.19" x 18.65"<br>(914 x 614 x 474 mm)<br>on 1" (25 mm) legs   | 34.5" x 21"<br>(876 x 533 mm)     | 4.5"<br>(114 mm)    | 120          | 935       | 7.8     | NEMA 5-15P              | 92 lbs. (42 kg)  |
|          |                            |                                                                       |                                   |                     | 220          | 864       | 3.9     | CEE 7/7 Schuko, BS-1363 | 92 lbs. (42 kg)  |
|          |                            |                                                                       |                                   |                     | 240          | 1030      | 4.3     | BS-1363, AS 3112        |                  |
|          |                            |                                                                       |                                   |                     | 220-230 (CE) | 864-946   | 3.9-4.1 | CEE 7/7 Schuko, BS-1363 |                  |
|          |                            |                                                                       |                                   |                     | 230-240 (CE) | 946-1030  | 4.1-4.3 | BS-1363                 |                  |
| GRSDS-41 | 3, 8                       | 41" x 24.19" x 21.59"<br>(1041 x 614 x 548 mm)<br>on 4" (102 mm) legs | 39.5" x 21"<br>(1003 x 533 mm)    | 4.5"<br>(114 mm)    | 120          | 1090      | 9.1     | NEMA 5-15P              | 96 lbs. (44 kg)  |
|          |                            |                                                                       |                                   |                     | 220          | 1003      | 4.6     | CEE 7/7 Schuko, BS-1363 | 96 lbs. (44 kg)  |
|          |                            |                                                                       |                                   |                     | 240          | 1195      | 5.0     | BS-1363, AS 3112        |                  |
|          |                            |                                                                       |                                   |                     | 220-230 (CE) | 1003-1097 | 4.6-4.8 | CEE 7/7 Schuko, BS-1363 |                  |
|          |                            |                                                                       |                                   |                     | 230-240 (CE) | 1097-1195 | 4.8-5.0 | BS-1363                 |                  |
| GRSDS-52 | 4, 10                      | 52" x 24.19" x 21.59"<br>(1321 x 614 x 548 mm)<br>on 4" (102 mm) legs | 50.5" x 21"<br>(1282 x 533 mm)    | 4.63"<br>(117 mm)   | 120          | 1400      | 11.7    | NEMA 5-15P              | 110 lbs. (50 kg) |
|          |                            |                                                                       |                                   |                     | 220          | 1275      | 5.8     | CEE 7/7 Schuko, BS-1363 | 110 lbs. (50 kg) |
|          |                            |                                                                       |                                   |                     | 240          | 1520      | 6.3     | BS-1363, AS 3112        |                  |
|          |                            |                                                                       |                                   |                     | 220-230 (CE) | 1275-1396 | 5.8-6.1 | CEE 7/7 Schuko, BS-1363 |                  |
|          |                            |                                                                       |                                   |                     | 230-240 (CE) | 1396-1520 | 6.1-6.3 | BS-1363                 |                  |
| GRSDS-60 | 5, 12                      | 60" x 24.19" x 21.59"<br>(1524 x 614 x 548 mm)<br>on 4" (102 mm) legs | 58.5" x 21"<br>(1485 x 533 mm)    | 4.5"<br>(114 mm)    | 120          | 1715      | 14.3    | NEMA 5-15P▲             | 167 lbs. (76 kg) |
|          |                            |                                                                       |                                   |                     | 220          | 1665      | 7.6     | CEE 7/7 Schuko, BS-1363 | 167 lbs. (76 kg) |
|          |                            |                                                                       |                                   |                     | 240          | 1715      | 7.2     | BS-1363, AS 3112        |                  |
|          |                            |                                                                       |                                   |                     | 220-230 (CE) | 1665-1820 | 7.6-7.9 | CEE 7/7 Schuko, BS-1363 |                  |
|          |                            |                                                                       |                                   |                     | 230-240 (CE) | 1575-1715 | 6.8-7.2 | BS-1363                 |                  |

\* Shipping weight includes packaging.

▲ Canadian models use NEMA 5-20P.



# Glo-Ray® Slant Merchandising Display Warmers

Models: GRSDS-24, -30, -36, -41, -52, -60 GRSDS-24D, -30D, -36D, -41D, -52D, -60D

## SPECIFICATIONS

### Dual Shelf — Slant Merchandising Display Warmers

The shaded areas contain electrical information for International models

| Model     | No. of Bulbs, Divider Rods | Dimensions (W x D x H)<br>Height includes 4" (102 mm) legs | Usable Heated Shelf Space (W x D) | Average Chute Width | Volts        | Watts     | Amps      | Plug                    | Ship Weight*      |
|-----------|----------------------------|------------------------------------------------------------|-----------------------------------|---------------------|--------------|-----------|-----------|-------------------------|-------------------|
| GRSDS-24D | 4, 10                      | 24" x 24.29" x 32.40"<br>(610 x 617 x 823 mm)              | 22.59" x 21"<br>(573 x 533 mm)    | 3.75"<br>(95 mm)    | 120          | 1355      | 11.3      | NEMA 5-15P              | 115 lbs. (52 kg)  |
|           |                            |                                                            |                                   |                     | 220          | 1260      | 5.7       | CEE 7/7 Schuko, BS-1363 | 115 lbs. (52 kg)  |
|           |                            |                                                            |                                   |                     | 240          | 1502      | 6.3       | BS-1363, AS 3112        |                   |
|           |                            |                                                            |                                   |                     | 220-230 (CE) | 1260-1378 | 5.7-6.0   | CEE 7/7 Schuko, BS-1363 |                   |
|           |                            |                                                            |                                   |                     | 230-240 (CE) | 1378-1502 | 6.0-6.3   | BS-1363                 |                   |
| GRSDS-30D | 4, 12                      | 30" x 24.29" x 32.40"<br>(762 x 617 x 823 mm)              | 28.59" x 21"<br>(726 x 533 mm)    | 4.25"<br>(108 mm)   | 120          | 1530      | 12.8      | NEMA 5-15P <sup>‡</sup> | 140 lbs. (64 kg)  |
|           |                            |                                                            |                                   |                     | 220          | 1419      | 6.5       | CEE 7/7 Schuko, BS-1363 | 140 lbs. (64 kg)  |
|           |                            |                                                            |                                   |                     | 240          | 1690      | 7.0       | BS-1363, AS 3112        |                   |
|           |                            |                                                            |                                   |                     | 220-230 (CE) | 1419-1552 | 6.5-6.8   | CEE 7/7 Schuko, BS-1363 |                   |
|           |                            |                                                            |                                   |                     | 230-240 (CE) | 1552-1690 | 6.8-7.0   | BS-1363                 |                   |
| GRSDS-36D | 4, 14                      | 36" x 24.29" x 32.40"<br>(914 x 617 x 823 mm)              | 34.59" x 21"<br>(878 x 533 mm)    | 4.5"<br>(114 mm)    | 120          | 1810      | 15.1      | NEMA 5-20P              | 160 lbs. (73 kg)  |
|           |                            |                                                            |                                   |                     | 220          | 1669      | 7.6       | CEE 7/7 Schuko, BS-1363 | 160 lbs. (73 kg)  |
|           |                            |                                                            |                                   |                     | 240          | 1990      | 8.3       | BS-1363, AS 3112        |                   |
|           |                            |                                                            |                                   |                     | 220-230 (CE) | 1669-1827 | 7.6-7.9   | CEE 7/7 Schuko, BS-1363 |                   |
|           |                            |                                                            |                                   |                     | 230-240 (CE) | 1827-1990 | 7.9-8.3   | BS-1363                 |                   |
| GRSDS-41D | 6, 16                      | 41" x 24.29" x 32.40"<br>(1041 x 617 x 823 mm)             | 39.59" x 21"<br>(1005 x 533 mm)   | 4.5"<br>(114 mm)    | 120          | 1090/1030 | 9.1/8.6   | NEMA 5-15P <sup>‡</sup> | 180 lbs. (82 kg)  |
|           |                            |                                                            |                                   |                     | 120/208-240  | 2120      | 9.1       | NEMA L14-20P            | 180 lbs. (82 kg)  |
|           |                            |                                                            |                                   |                     | 220          | 1951      | 8.9       | CEE 7/7 Schuko, BS-1363 |                   |
|           |                            |                                                            |                                   |                     | 240          | 2325      | 9.7       | BS-1363, AS 3112        |                   |
|           |                            |                                                            |                                   |                     | 220-230 (CE) | 1951-2135 | 8.9-9.3   | CEE 7/7 Schuko, BS-1363 |                   |
| GRSDS-52D | 8, 20                      | 52" x 24.29" x 32.40"<br>(1321 x 617 x 823 mm)             | 50.59" x 21"<br>(1284 x 533 mm)   | 4.63"<br>(117 mm)   | 230-240 (CE) | 2135-2325 | 9.3-9.7   | BS-1363                 | 215 lbs. (98 kg)  |
|           |                            |                                                            |                                   |                     | 120          | 1400/1325 | 11.7/11.0 | NEMA 5-15P <sup>‡</sup> |                   |
|           |                            |                                                            |                                   |                     | 120/208-240  | 2725      | 11.7      | NEMA L14-20P            |                   |
|           |                            |                                                            |                                   |                     | 220          | 2483      | 11.3      | CEE 7/7 Schuko, BS-1363 |                   |
|           |                            |                                                            |                                   |                     | 240          | 2960      | 12.3      | BS-1363, AS 3112        | 215 lbs. (98 kg)  |
| GRSDS-60D | 10, 24                     | 60" x 24.29" x 32.40"<br>(1524 x 617 x 823 mm)             | 58.59" x 21"<br>(1488 x 533 mm)   | 4.5"<br>(114 mm)    | 220-230 (CE) | 2483-2718 | 11.3-11.8 | CEE 7/7 Schuko, BS-1363 |                   |
|           |                            |                                                            |                                   |                     | 230-240 (CE) | 2718-2960 | 11.8-12.3 | BS-1363                 | 238 lbs. (108 kg) |
|           |                            |                                                            |                                   |                     | 120/208-240  | 3340      | 14.3      | NEMA L14-20P            |                   |
|           |                            |                                                            |                                   |                     | 220          | 3240      | 14.7      | CEE 7/7 Schuko, No Plug |                   |
|           |                            |                                                            |                                   |                     | 240          | 3340      | 13.9      | AS 3112, No Plug        |                   |
|           |                            |                                                            |                                   |                     | 220-230 (CE) | 3240-3541 | 14.7-15.4 | CEE 7/7 Schuko, No Plug | 238 lbs. (108 kg) |
|           |                            |                                                            |                                   |                     | 230-240 (CE) | 3067-3340 | 13.3-13.9 | No Plug                 |                   |

\* Shipping weight includes packaging.

▲ Canadian models use NEMA 5-20P.


‡ Not available for Canada, has two NEMA 5-15P power cords.

## CORD LOCATION


Control side at right base corner.

## PLUG CONFIGURATIONS


NEMA 5-15P




NEMA 5-20P




CEE 7/7 Schuko




BS-1363



AS 3112



NEMA L-14-20P



## PRODUCT SPECS

### Glo-Ray® Slant Merchandising Warmers

The Merchandising Warmer shall be a Glo-Ray® Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The warmer shall be rated at ... watts, ... volts, and be ... inches (millimeters) in overall width. It shall consist of a thermostatically-controlled, hardcoated heated base, infrared heat from above, full view tempered glass sides, adjustable divider rods,

and incandescent display lights. The infrared heating element shall be tubular metal sheathed and the warmer shall have a cord with plug attached.

Accessories shall include flip-up doors, 4" (102 mm) legs, and additional stainless steel dividers rods.

Warranty consists of 24/7 parts and service assistance (US and Canada only).

**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
(800) 558-0607 | (414) 671-6350 | [www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com)