

DCM-500B_F

SANITARY CUBELET ICE MACHINE/DISPENSER

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

DCM-500B_F

3/06

Item # 13143

DIMENSIONS

W x D x H

DCM-500B_F

26 x 22 1/2 x 40

SD-450

26 1/4 x 22 x 32 1/2

SD-500

25 9/10 x 22 x 32 3/4




DCM-500
Countertop




DCM-500
Countertop
with optional
6" legs



DCM-500
Floor Model
with optional
stand



SD-450
optional
stand



SD-500
optional
stand

DCM-500BAF

Air-Cooled
Shown on an optional
SD-450 Stand

DCM-500BWF

Water-Cooled



DCM-500B_F

- CleanCycle 12®. Every 12 hours, unit performs 15 minute purge to rid itself of impurities
- Corrosion resistant stainless steel exterior
- Up to 567 lbs. of ice production per 24 hours, with 40 lbs. built-in storage
- Easy to chew, cubelet ice
- Self contained design reducing opportunities for cross contamination
- Dispenses ice and water



SD-450 Stand / SD-500 Stand

- Heavy duty stand for floor model icemaker/dispenser
- Corrosion resistant stainless steel exterior
- Easy cleaning with attractive appearance
- Locking doors standard on SD-500



Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Two Year - Parts & Labor on entire machine.

Five Year - Parts on: Compressor, air-cooled condenser.



SANITARY CUBELET ICE MACHINE/DISPENSER

DIMENSIONS
W x D x H

DCM-500B_F
26 x 22 ^{1/2} x 40
SD-450
26 ^{1/4} x 22 x 32 ^{1/2}
SD-500
25 ^{9/10} x 22 x 32 ^{3/4}

- Hands-free ice machine/dispenser
- Optional stand
- Optional stand with locking doors

AIR-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	525	510	485
80°	461	438	416
90°	396	385	358

WATER-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	567	549	539
80°	529	519	509
90°	500	495	481



UTILITY CONSUMPTION

Model Number	KWH per 100 LBS.		Gal. Per 100 LBS.	
	90/70	70/50	90/70	70/50
DCM-500BAF	6.6	4.4	12.0	12.0
DCM-500BWF	4.7	4.1	12.0	12.0

SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
DCM-500BAF	Air-Cooled	12	20	290 lbs.
DCM-500BWF	Water-Cooled	11.5	20	290 lbs.
SD-450	N/A	N/A	N/A	110 lbs.
SD-500	N/A	N/A	N/A	98 lbs.


CUBELET DIMENSIONS

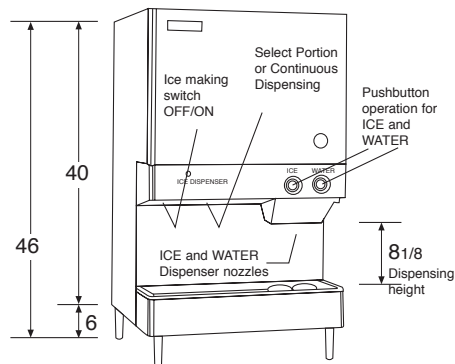



40 lb. Capacity Built-in Bin




Counter Top



Counter Top

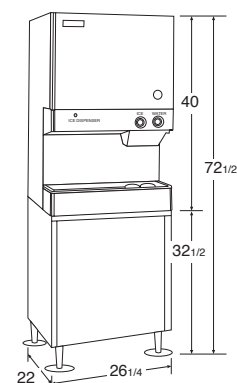Floor Model
with Optional Stand

Optional Stand

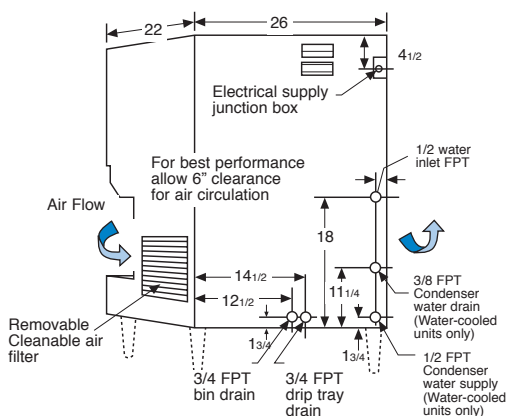

ELECTRICAL & PLUMBING/DCM-500B_F

- 115V/60/1
- 20 amp Max Fuse Size
- 1/2" FPT Water Inlet
- 3/4" FPT x2 Drain



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

OPERATING LIMITS

• Ambient Temp Range	45 - 100°F
• Water Temp Range	45 - 90°F
• Water Pressure	10 - 113psig
• Voltage Range	104 - 127V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter. (Air-cooled model only)

