

Ice-O-Matic®

ICE1506 - Cube Ice Maker



ICE1506 on a dispenser

Features

- Space saving 22" (558 mm) tall design.
- Produces up to 1,432 lbs (650 kg) of ice per day.
- *Harvest Assist* provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- *Pure Ice®* exclusively by Ice-O-Matic. Built-in antimicrobial protection for the life of the ice maker inhibits bacteria growth on ice maker surfaces. Ice-O-Matic's optional water filtration system provides protection against unpleasant tastes, odors and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- *Longest warranty in the industry.* Purchase an Ice-O-Matic water filter with your cube ice maker, replace the filter every six months, and the evaporator warranty is extended to 7 years parts and labor (*available in the U.S. and Canada only*).
- Constructed from corrosion-resistant stainless steel.
- Note: The ICE1506 comes equipped with a Bin Thermostat kit

Options & Accessories

Water Filters			
Ice Machine Model	Manifold		Inline
	System	Replacement	System
ICE1506	IFQ2	IOMQ (2)	N/A

Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Three years **Parts and Labor**.
- Five years **Parts** coverage on the evaporator and compressor.
- Seven years **Parts and Labor** on the evaporator when you purchase an Ice-O-Matic water filter with your cube ice maker and replace the filter every six months (*available in the U.S. and Canada only*).

Ice Form



Full Cube	
W x D x H (in)	7/8 x 7/8 x 7/8
W x D x H (mm)	22 x 22 x 22
Half Cube	
W x D x H (in)	7/8 x 7/8 x 1/2
W x D x H (mm)	22 x 22 x 10

1506 is used with dispensers only



Kits	Dispensers	
	IOD200	IOD250
	KBT25030	KBT25030

ICE1506 Cube Ice Maker



ICE1506 Cube Ice Maker

- A. Ice maker potable water in, $\frac{3}{8}$ " FPT.
- B. Ice maker water out, $\frac{3}{4}$ " FPT.
- C. Hole for electrical connections, $\frac{3}{8}$ ".
- D. Ice maker water out, $\frac{3}{4}$ " FPT
(optional).
- E. Ice maker potable water in, $\frac{3}{8}$ " FPT
(optional).
- F. Liquid line, $\frac{3}{8}$ " male quick connect
coupling for precharged line set
(remote only).
- G. Discharge line, $\frac{1}{2}$ " male quick connect
coupling for precharged line set.
- H. Ice cube dispense area in bottom of
unit.

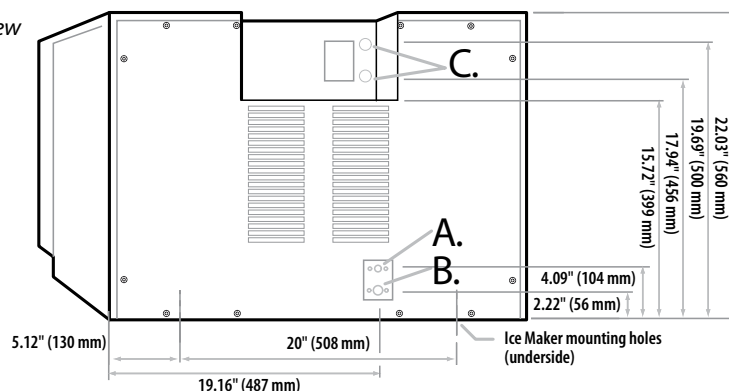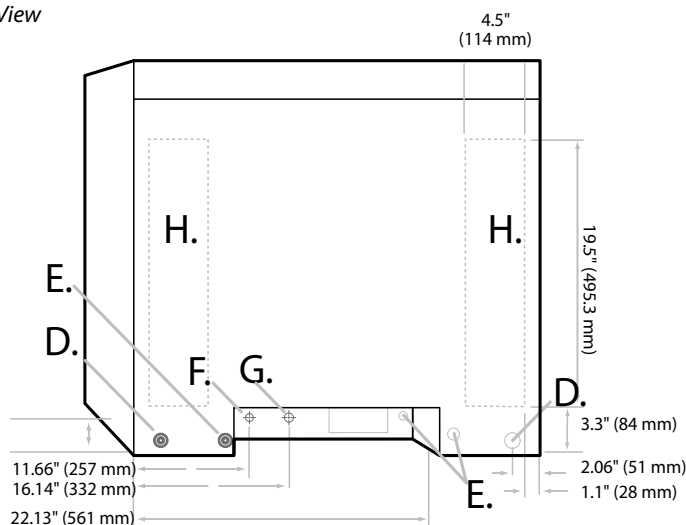

	Minimum	Maximum
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)
Water Temp.	40°F (4.4°C)	100°F (38°C)
Water Pressure	20 PSIG (1.4 BAR)	60 PSIG (4.1 BAR)

All Models	
W x D x H (inches)	30 x 28.5 x 22
W x D x H (mm)	762 x 724 x 558

Model Number	Cond. Unit	Ice Production per 24hrs		Water Usage gallons per 100 lbs of Ice 90°F air/70°F water		kWH Used per 100 lbs of ice @ 90°F air/ 70°F water	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Approx. BTUs per hour
		70°F air/ 50°F water lbs (kg)	90°F air/ 70°F water lbs (kg)	Potable	Condenser					
ICE1506HR★	Remote*	1432 (650)	1216 (553)	19.5	-	4.6	208-230/60/1	24.5	30	22,491

NOTES:

Number of Wires:	3 (including ground)
Approx. Shipping Weight lbs (kg):	300 (136)w
Refrigerant Type:	R404A

★ENERGY STAR qualified machine. Please see our website www.iceomatic.com for the latest list of ENERGY STAR qualified machines and available rebates.

11100 E. 45th Avenue
Denver, CO 80239

Phone: 1. 866. PURE. ICE
Fax: 303. 371. 6296
www.iceomatic.com

Rev: A-02/09
Part: 1019