



1216 NON-RISE ADJUSTABLE HINGE

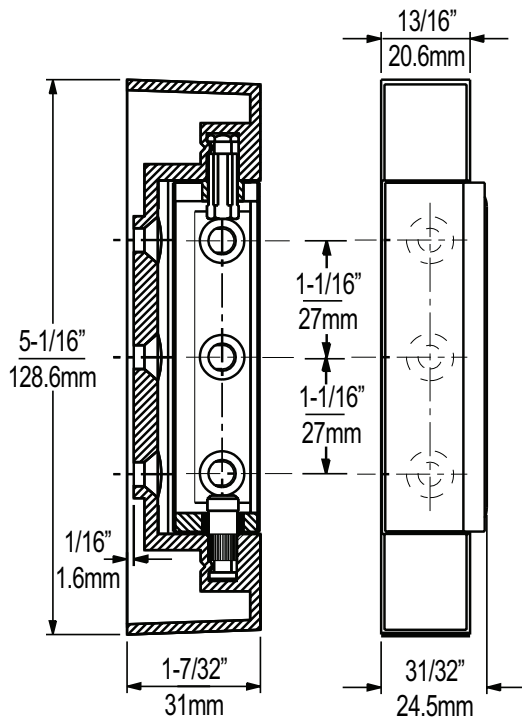

A. ADJUSTABLE

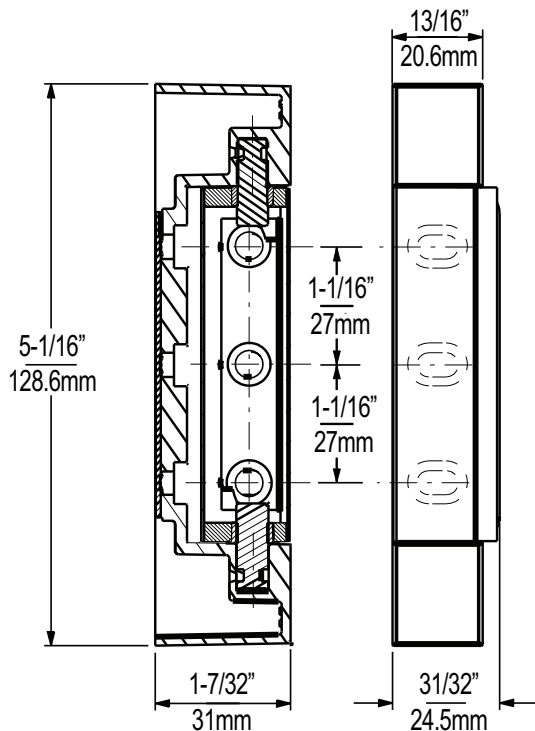


B. DUAL ADJUSTABLE


U. S. Pat. No. 7,055,214

SPRING CARTRIDGE KIT INSTALLATION


No. 1216 hinge easily converts to spring hinge for self-closing applications.




1. Assemble spring cartridge as shown.



2. Slip bushing over hexagon pin on mounted hinge; then insert adjustment pin into adjustment bushing assembly.



3. Grasping adjustment pin, compress spring and place adjustment bushing assembly over round pin.



4. Adjust tension; then insert stop pin in hole of adjustment bushing assembly.

Ref.	Model No.	Item	Offset
A	1216000001	Adjustable Hinge	1-1/8" (28.6 mm)
B	1216000012	Dual Adjustable Hinge	1-1/8" (28.6mm)
	1216000027	Spring Cartridge Kit	

PACKAGING: 20 pair per carton.

WEIGHT: Approx. 22 lb. (10.0 kg) per carton.