



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.flamegard.com • www.componenthardware.com

PROJECT NAME: _____

LOCATION: _____

SPECIFIER ITEM NO. _____ QTY: _____


FLAME GARD PART NO. _____

Flame Gard® LED Light for
Exhaust Canopy Hoods

LED-40000x Series

LED-40000W 2800K-3500K

LED-40000N 4500K-5500K

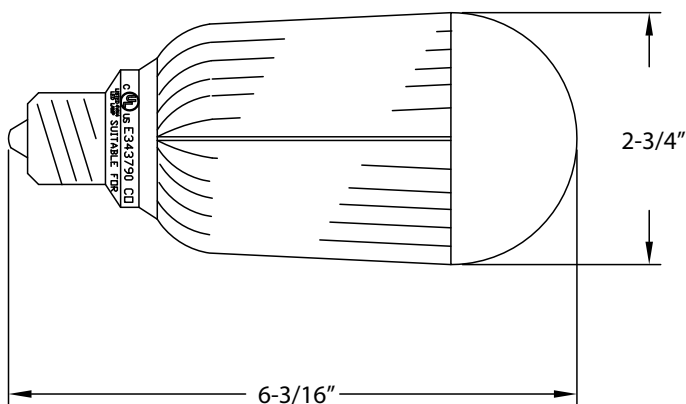

90-260 VAC*

Maximum Operating Temperature: 80°C (176°F)

Warranty - 5 years

*UL listing for 120V application only.

Replacement bulb for Edison-style screw-in light fixtures

High Efficiency, Environmentally Friendly

- Only UL Listed Edison-base LED bulb rated to 75°C (167°F)
Max operating temperature 80°C (176°F)
- Replaces inefficient incandescent bulbs; low wattage for fast payback
- 120 degree beam angle floods the workspace with light
- Rated for 50,000 hour life – 50x standard incandescent bulb
- Mercury-free
- Instant on; no ballast to warm up
- Exceeds Federal Energy Act requirement
- Unbreakable polycarbonate enclosure
- No ultraviolet emission; will not attract insects

Easy Installation

- Simply screw in to existing fixture – no adapter required
- Fits any A19/E26/E27 fixture (globe must be installed to comply with UL listing)

NOTE:

Lamp housing and assembly and globe sold separately.
Installation of new globe is recommended as not all
existing globes will accommodate the LED-40000 bulb.

Model	Watts	Lumens	Case Quantity
LED-40000N-P	12	960	1 In blister pack for retail sale
LED-40000N-B	12	960	32
LED-40000W-B	12	930	32
LED-400001N	12	960	32 Includes L55-X022 globe



File No. E343790