




MODELS
MOD-400, MOD-400D
MOD-400T, MOD-400TD
MOD-400DM, MOD-400TDM
BUILT-IN MODULAR WARMERS

DIMENSIONS:

$\frac{\text{INCH}}{\text{(MM)}}$

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST SURFACE.			
BACK	SIDE	BOTTOM	FRONT
$\frac{1}{(25)}$	$\frac{1}{(25)}$	$\frac{6 \frac{3}{4}}{(171)}$	$\frac{6}{(152)}$

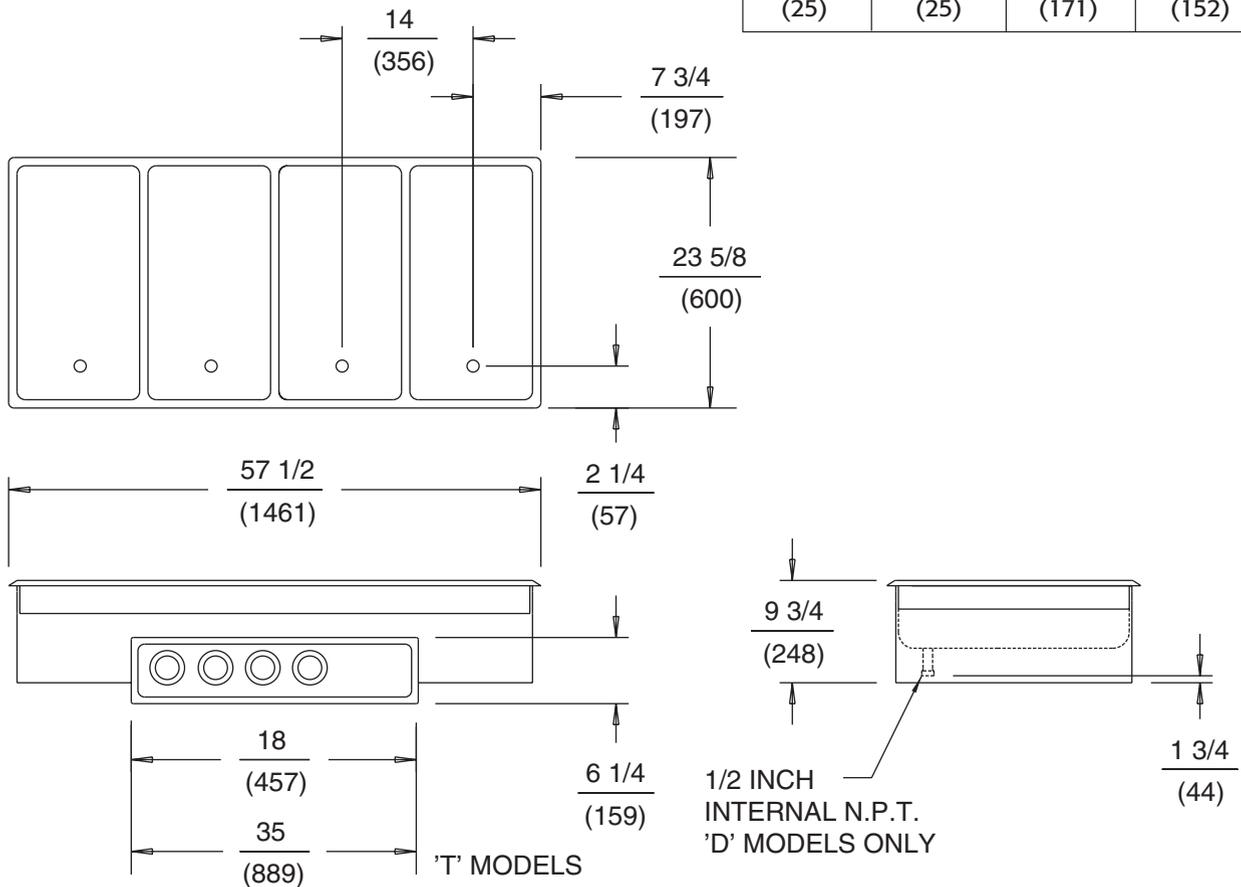

MOD-400, MOD-400D, MOD-400T, MOD-400TD, MOD-400DM AND MOD-400TDM ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS PER LINE PHASE 3			AMPS SINGLE PHASE	POWER SUPPLY CORD
			L1	L2	L3		
MOD-400	208	3600	11.2	11.2	7.5	17.3	NONE
MOD-400	240	4800	13.0	13.0	8.7	20.0	NONE
MOD-400T	208	4960	14.5	14.5	9.8	23.8	NONE
MOD-400T	240	6600	17.8	17.8	11.3	27.5	NONE

All models with a 'D' or 'DM' suffix have the same electrical specs as the standard MOD-400 or MOD-400T models.

NOTE: Specifications are subject to change without notice. See installation instruction sheet prior to installing the unit. This document is not for installation purposes. The Drain Manifold with Valve (1" internal N.P.T.) is supplied for DM & TDM models only.

